

Heat Exchanger Specification Sheet

When Schedule Counts

Company Name: Contact: Email Address: Phone: Shell Side **Tube Side** Product Flow Rate / / Temp In / Temp Out Pressure In Max Pressure Drop **Rating Temp** 375°F **Rating Pressure** 150 psig Materials of Construction 304L/316L/Or Connections TC / Flg / Cplg / FNPT Orientation Hor / Vert **TEMA** Type U-tube / Straight tube **TEMA Construction** B, C or R Product contact surfaces shall meet 32 Ra µinch finish requirements. Design: Product contact surfaces shall meet 3-A Dairy Standard 12-07 finish requirements.

Sanitary Pharmaceutical Unit (Documentation package to be included).

Non-Sanitary Design. Tubeside to be non-sanitary finish, exterior to be polished to 40 Ra finish.

Industrial grade design. All surfaces to be mill finish.


Restrictions or Comments:____

Enerquip, LLC

611 North Road, P.O. Box 467, Medford, WI 54451

715-748-5888 | Sales@enerquip.com | www.enerquip.com | Made in USA



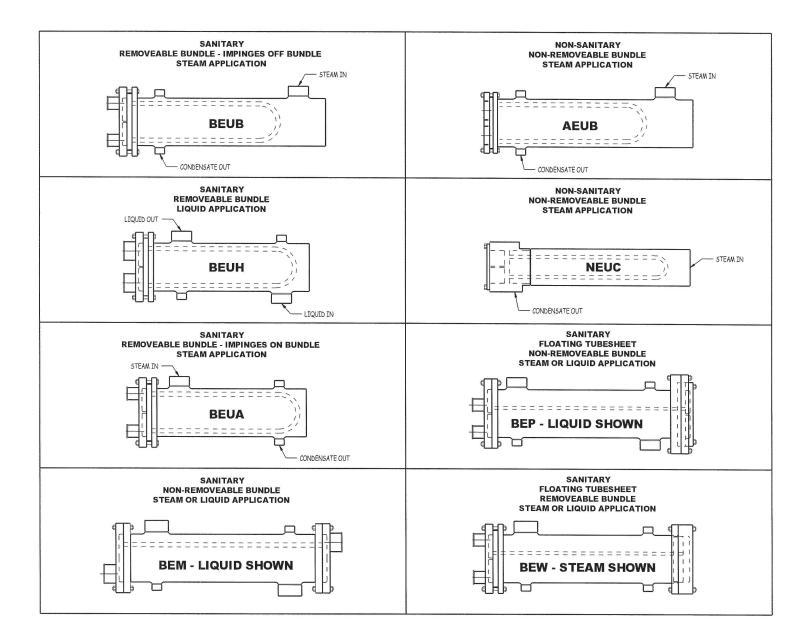

Don't see what you need? Enerquip's experienced team of engineers will be glad to custom design your heat exchanger.

Call now at 715-748-5888 or email us at: Sales@Enerquip.com www.enerquip.com